

In-Line Duct Fans

- *EKR, EKH, DKH*

- *EKRS, EKHS, DKHS*




Air in Motion.
Wolter Fans.

K01.EKH

wolter

Fan type code

E K H S 315 - 4

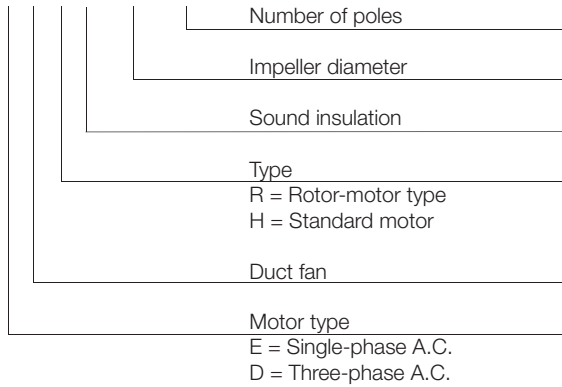


Relative octave sound power level A-weighted


	f_M [Hz]		L _{WA}	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz
280~355	L _{WA6rel} [dB]	Outlet side	0	-20	-11	-6	-4	-7	-13	-19
	L _{WA5rel} [dB]	Inlet side	-3	-16	-10	-10	-7	-8	-14	-21
	L _{WA2rel} [dB]	Casing EKH/DKH	-17	-26	-21	-24	-23	-30	-40	-43
	L _{WA2rel} [dB]	Casing EKHS/DKHS	-25	-34	-29	-32	-31	-38	-48	-51
400~450	L _{WA6rel} [dB]	Outlet side	0	-16	-10	-6	-5	-6	-13	-22
	L _{WA5rel} [dB]	Inlet side	-3	-18	-13	-12	-9	-7	-14	-21
	L _{WA2rel} [dB]	Casing EKH/DKH	-17	-22	-20	-24	-24	-29	-40	-46
	L _{WA2rel} [dB]	Casing EKHS/DKHS	-25	-30	-28	-32	-32	-37	-48	-54
500~710	L _{WA6rel} [dB]	Outlet side	0	-16	-8	-6	-5	-8	-14	-23
	L _{WA5rel} [dB]	Inlet side	-3	-17	-11	-11	-8	-9	-15	-21
	L _{WA2rel} [dB]	Casing EKH/DKH	-17	-22	-18	-24	-24	-31	-41	-47
	L _{WA2rel} [dB]	Casing EKHS/DKHS	-25	-30	-26	-32	-32	-39	-49	-55

Quick selection

230 V, 1AC, 2- 4- 6-pole

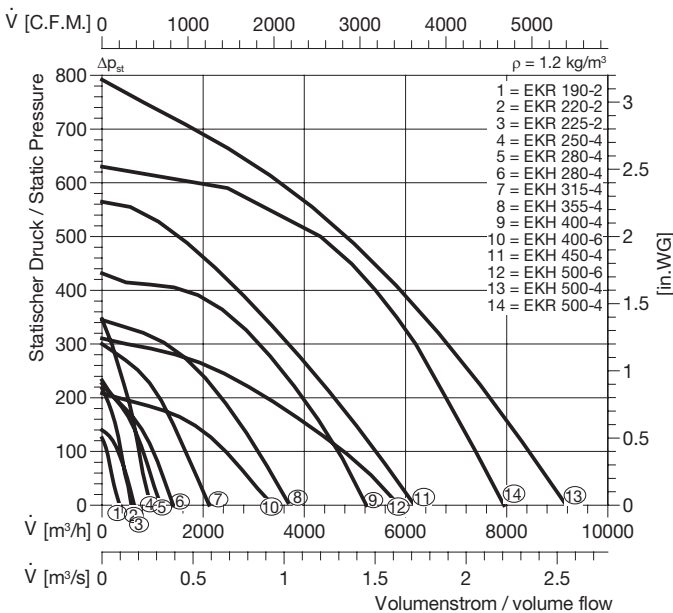

400 V, 3AC, 4- 6-pole

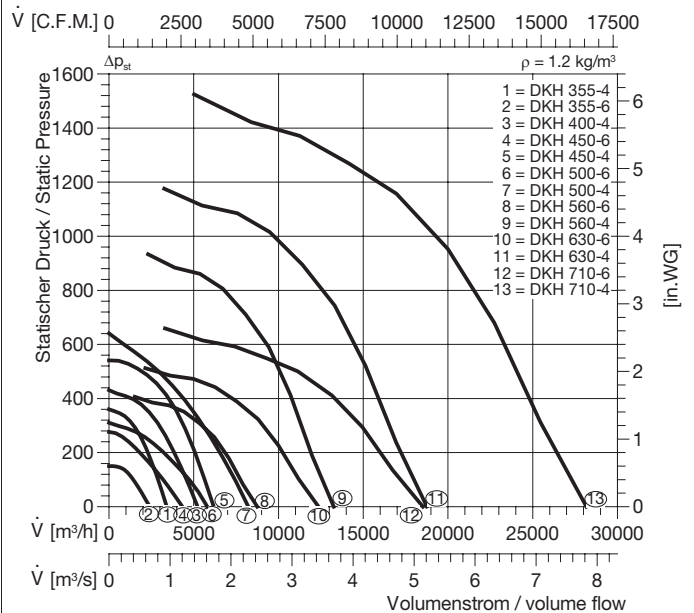

Advantages:

- easy installation via 20 mm standard flange
- fans can be installed in any position
- simple electrical connection via terminal box fitted to the outside, terminal box in protection class IP 54 (explosion-proof executions with wires led to the outside)
- 100% speed controllable by auto transformer or electronic controller
- motor protection by thermal contacts as standard (Explosion-proof motors with PTC thermistors)
- extremely low starting currents
- compact design

Design features:

Duct fans combine the advantages of axial fans, straight airflow and easy installation, with those of centrifugal fans, such as high pressure stability, low noise level and high efficiency.

Casing:

- EKH, DKH - Casing made of galvanised sheet steel formed as a rectangular air duct, with standard tube flanges (20 mm width) at inlet and outlet sides.
- EKHS, DKHS - Panels are made from galvanised sheet steel insulated with sound absorbing elastomeric foam.

Impeller

EKH/DKH - Backward-curved radial centrifugal made of sheet steel or plastic.

EKR - Backward-curved radial centrifugal made of galvanized plate or plastic, impellers are fitted directly onto the rotor of the external rotor motor. All impellers are balanced at two levels according to G 2.5 (ISO 21940-11 / AMCA 204).

Electrical connection

The motors are wired to an external terminal box.

Fan Performance Curves

The performance curves of these fans have been established using a test chamber according to AMCA 210, mounting position D (connected at both sides). The curves indicate the static pressure increase Δp_{st} as a function of the volume flow. The outlet velocity increase c (l/m/s) shown in the performance curves refers to the flange cross-sectional area of the fan housing.

Sound levels

The figures given in the performance curves represent the A-weighted sound power levels L_{WA6} in decibel at the outlet side in duct systems. The A-weighted sound power level at the inlet side L_{WA5} , according to AMCA 300, can be calculated via the relative sound power levels or can be obtained by the following approximation calculation:

$$L_{WA5} \approx L_{WA6} - 3 \text{ dB(A)}$$

The A-weighted sound power level radiated from the casing L_{WA2} , according to DIN 45 635, part 38, can be calculated via the relative sound power levels (see below) or is obtained approximately as follows:

$$L_{WA2} \approx L_{WA6} - 17 \text{ dB(A)} \text{ - for EKH, EKR, DKH or DKR}$$


$$L_{WA2} \approx L_{WA6} - 25 \text{ dB(A)} \text{ - for EKHS, EKRS, DKHS OR DKRS}$$

The A-weighted sound pressure level L_{PA} at a distance of 1 metre is obtained approximately by deducting 7 dB(A) from the A-weighted sound power level:

$$L_{PA(1m)} \approx L_{WA2} - 7 \text{ dB(A)}$$


It is important to note that reflexion and environmental characteristics as well as resonant frequencies influence the sound pressure levels in different ways.

EKR 190-2

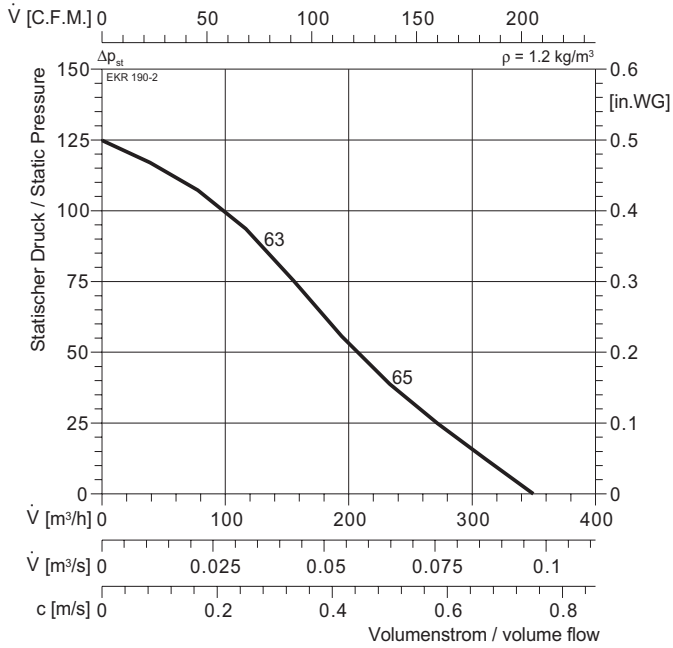


Typ :	EKR 190-2		IP 54	$L_{WA,rel}$ ΔdB	L_{WA2}	L_{WA5}	L_{WA6}
ArtNr :			E11	$L_{WA,tot}$	-20	-1	0
	6,8 kg		GS 1	125 Hz	-28	-13	-12
U :	230 V 50 Hz		NE 0,5	250 Hz	-31	-5	-4
P_1 :	0,07 kW		RPE 02	500 Hz	-27	-6	-5
I_N :	0,3 A			1 kHz	-27	-13	-12
n :	2450 min ⁻¹			2 kHz	-26	-10	-9
C_{400V} :	2 μF			4 kHz	-31	-21	-20
t_R :	40 °C			8 kHz	-37	-27	-26

EKR

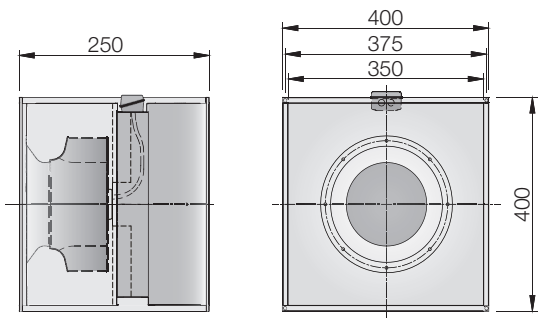


Mounting Feet as Optional

EKR 220-2

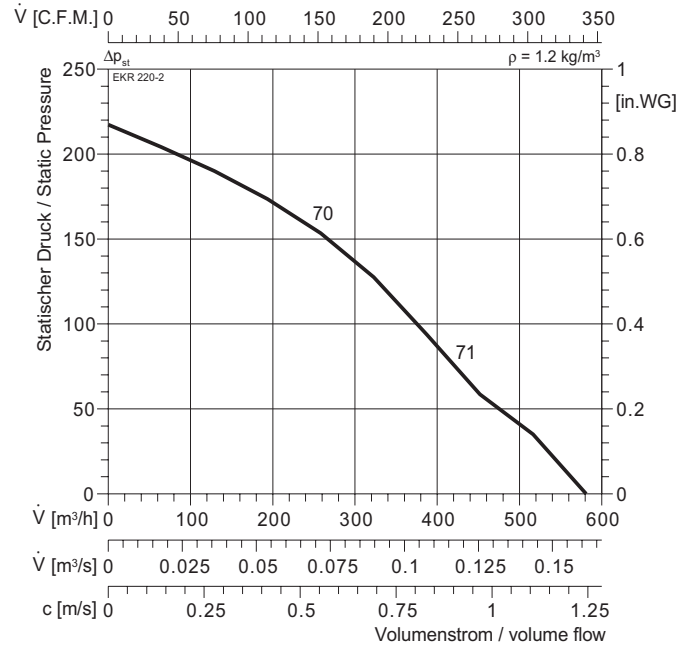


Typ :	EKR 220-2		IP54	$L_{WA,rel}$ ΔdB	L_{WA2}	L_{WA5}	L_{WA6}
ArtNr :			E11	$L_{WA,tot}$	-13	-1	0
	8,5 kg		GS 1	125 Hz	-35	-18	-17
U :	230 V 50 Hz		NE 0,5	250 Hz	-33	-5	-4
P_1 :	0,100 kW		RPE 02	500 Hz	-17	-6	-5
I_N :	0,47 A			1 kHz	-18	-7	-6
n :	2580 min ⁻¹			2 kHz	-24	-13	-12
C_{400V} :	3 μF			4 kHz	-20	-18	-17
t_R :	40 °C			8 kHz	-24	-26	-25

EKR

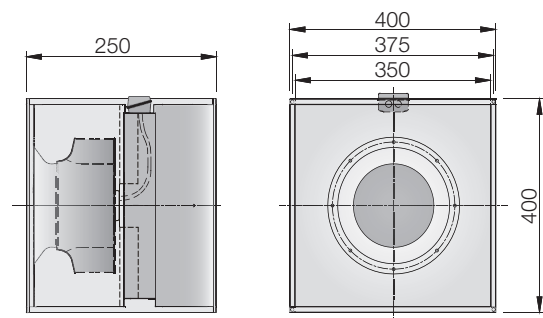


Mounting Feet as Optional

EKR 225-2

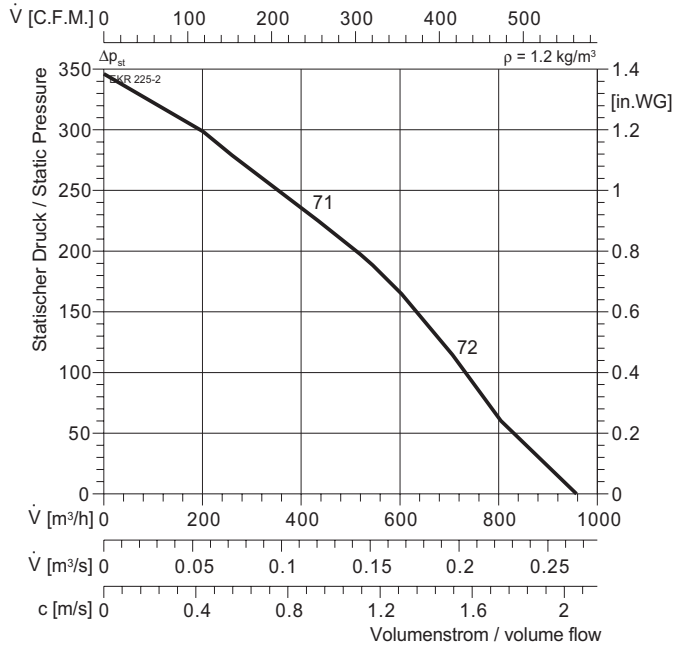


Typ :	EKR 225-2		IP54	$L_{WA\ rel} \Delta dB$	L_{WA2}	L_{WA5}	L_{WA6}
ArtNr :			E11	$L_{WA\ tot}$	-14	-1	0
	10 kg		GS 1	125 Hz	-14	-1	0
U :	230 V 50 Hz		NE 1,5	250 Hz	-31	-8	-7
P_1 :	0,15 kW		RPE 02 A	500 Hz	-21	-7	-6
I_N :	0,7 A			1 kHz	-16	-8	-7
n :	2600 min ⁻¹			2 kHz	-21	-9	-8
C_{400V} :	4 μF			4 kHz	-28	-11	-10
t_R :	40 °C			8 kHz	-38	-15	-14

EKR

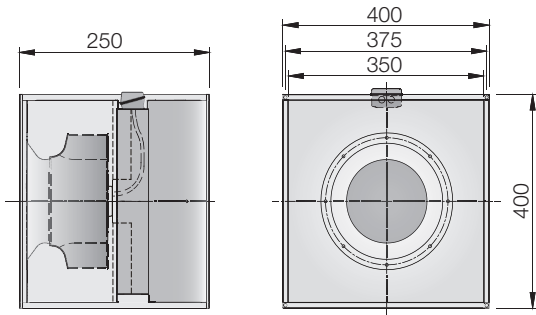


Mounting Feet as Optional

EKR 250-4

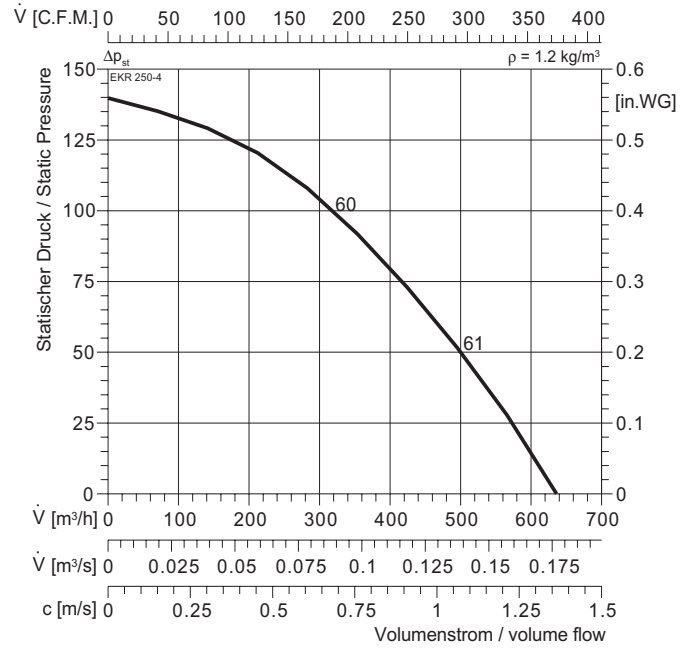


Typ :	EKR 250-4		IP54	$L_{WA\ rel} \Delta dB$	L_{WA2}	L_{WA5}	L_{WA6}
ArtNr :			E11	$L_{WA\ tot}$	-6	-1	0
	12 kg		GS 1	125 Hz	-29	-21	-20
U :	230 V 50 Hz		NE 0,5	250 Hz	-22	-14	-13
P_1 :	0,065 kW		RPE 02 A	500 Hz	-15	-13	-12
I_N :	0,29 A			1 kHz	-7	-7	-6
n :	1392 min ⁻¹			2 kHz	-17	-5	-4
C_{400V} :	2 μF			4 kHz	-20	-8	-7
t_R :	40 °C			8 kHz	-30	-11	-10

EKR

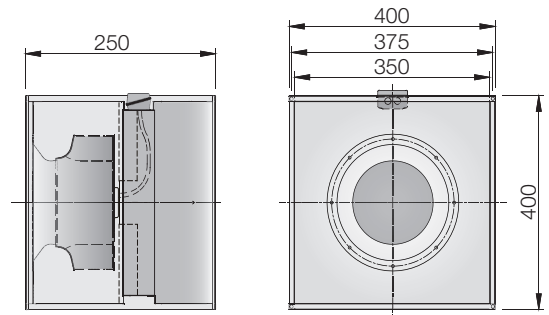


Mounting Feet as Optional

EKR 280-4

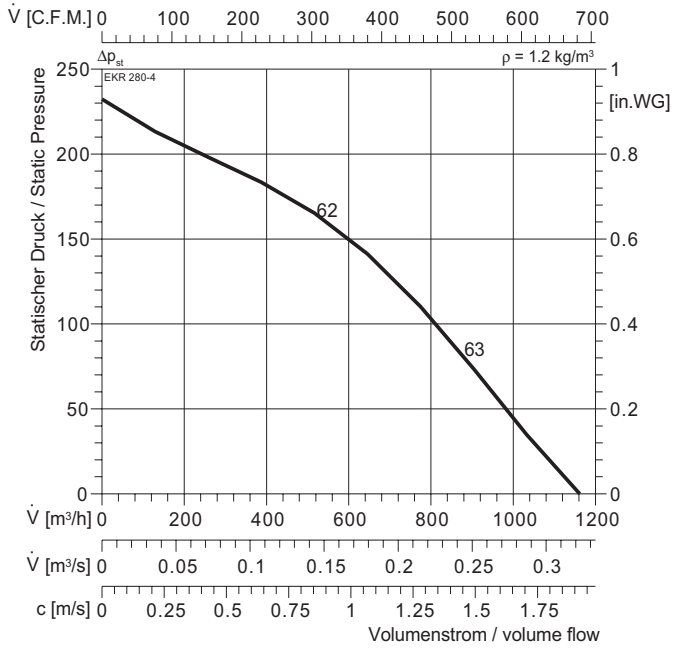


Typ :	EKR 280-4		IP54	$L_{WA,rel} \Delta GB$	L_{WA2}	L_{WA5}	L_{WA6}
ArtNr :			E11	$L_{WA,tot}$	-9	-1	0
	24 kg		GS 1	125 Hz	-37	-23	-22
U :	230 V 50 Hz		NE 0,5	250 Hz	-28	-14	-13
P_1 :	0,085 kW		RPE 02 A	500 Hz	-20	-11	-10
I_N :	0,38 A			1 kHz	-10	-8	-7
n :	1395 min ⁻¹			2 kHz	-17	-7	-6
C_{400V} :	2 μF			4 kHz	-21	-9	-8
t_R :	40 °C			8 kHz	-28	-11	-10

EKR

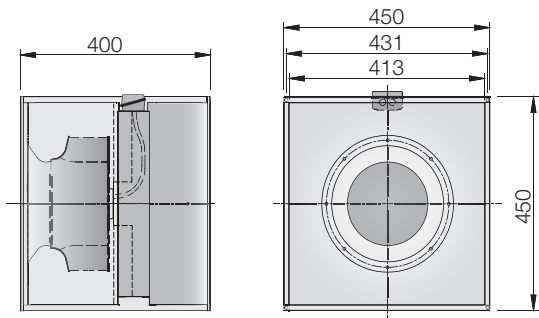


Mounting Feet as Optional

EKH / EKHS 280-4

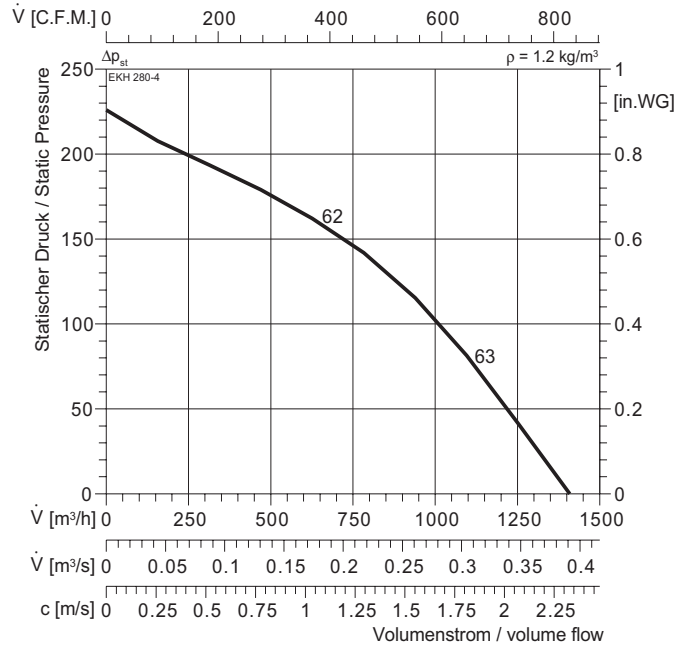


Typ :	EKH / EKHS 280-4		IP54	$L_{WA,rel} \Delta GB$	L_{WA2}	L_{WA5}	L_{WA6}
ArtNr :			E13	$L_{WA,tot}$	-9	-1	0
	24/25 kg		GS 1	125 Hz	-37	-23	-22
U :	220 V 50 Hz		NE 1,5	250 Hz	-28	-14	-13
P_2 :	0,18 kW		RPE 02	500 Hz	-20	-11	-10
I_N :	1,54 A			1 kHz	-10	-8	-7
n :	1360 min ⁻¹			2 kHz	-17	-7	-6
C_{450V} :	8 μF			4 kHz	-21	-9	-8
t_R :	40 °C			8 kHz	-28	-11	-10

EKH / DKH

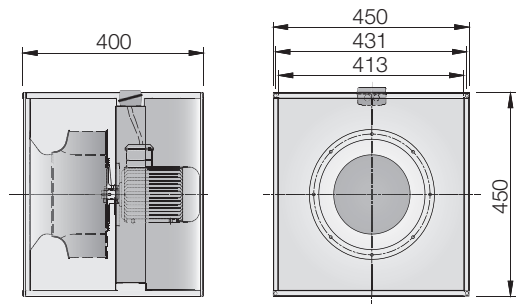


EKHS / DKHS

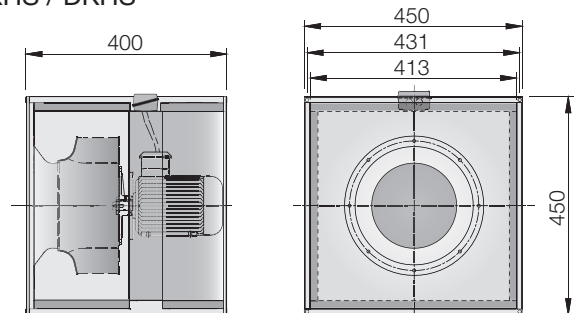

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

EKH / EKHS 315-4

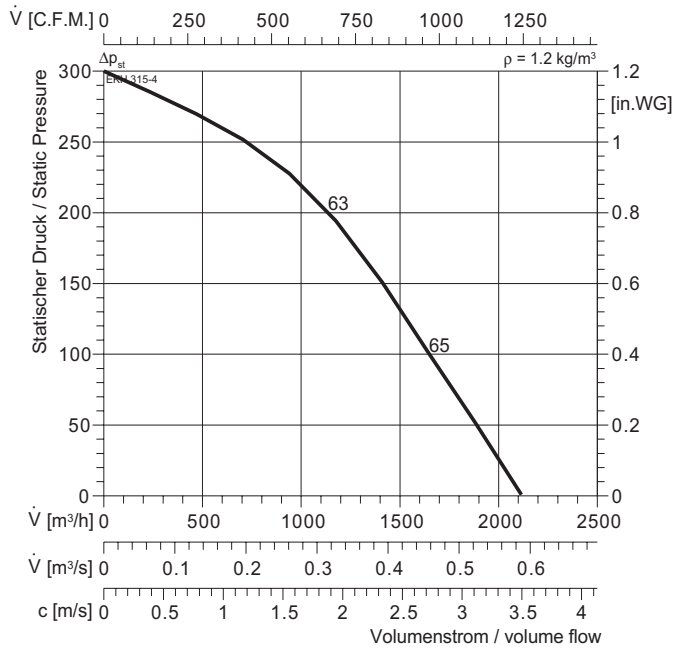


Typ : EKH / EKHS 315-4	⚠ IP 54
ArtNr :	★ E13
■ : 28/29 kg	🗑 GS 1
U : 220 V 50 Hz	🔌 NE 1,5
P ₂ : 0,25 kW	📉 RPE 06
I _N : 2,02 A	
n : 1370 min ⁻¹	
C _{450V} : 12 μF	
t _R : 40 °C	

EKH / EKHS 355-4

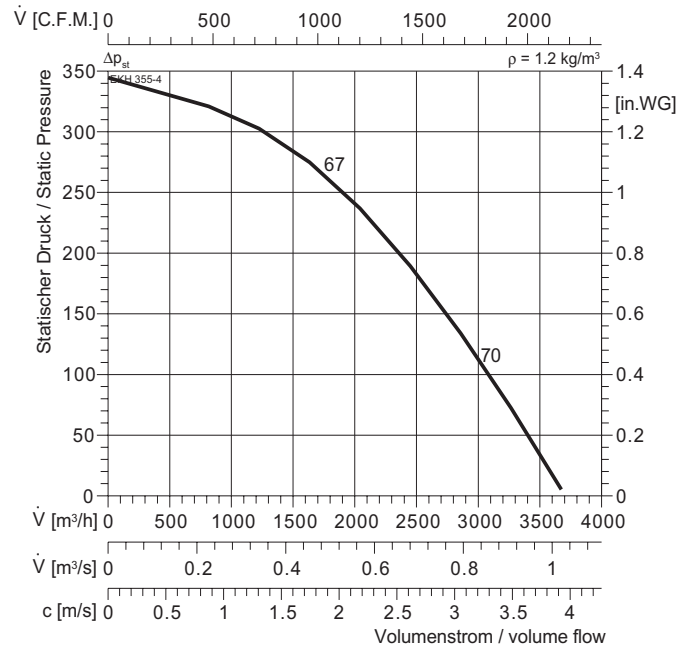


Typ : EKH / EKHS 355-4	⚠ IP54
ArtNr :	★ E13
■ : 30/31 kg	🗑 GS 1
U : 220 V 50 Hz	🔌 NE 3,2
P ₂ : 0,37 kW	📉 RPE 06
I _N : 2,95 A	
n : 1370 min ⁻¹	
C _{450V} : 16 μF	
t _R : 40 °C	


EKH / DKH

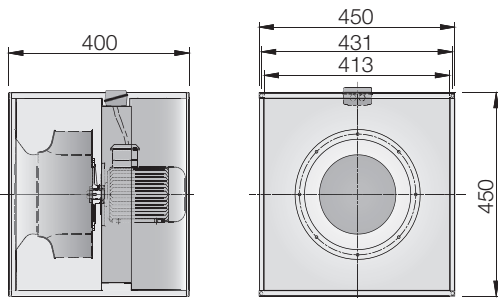


EKH / DKH

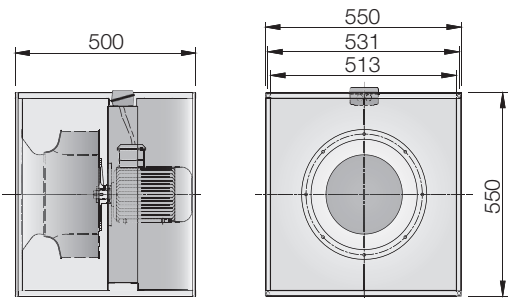

EKHS / DKHS

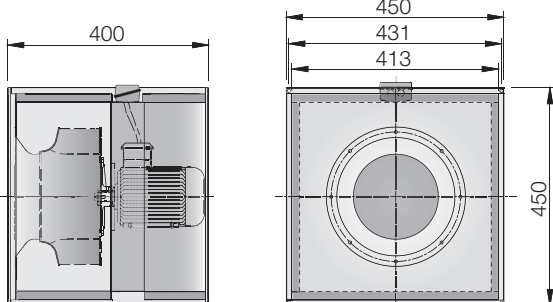

EKHS / DKHS

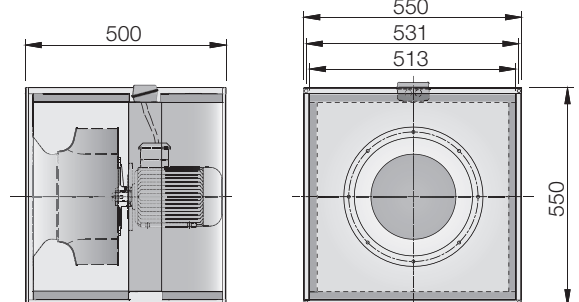


Mounting Feet as Optional

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

DKH / DKHS 355-4

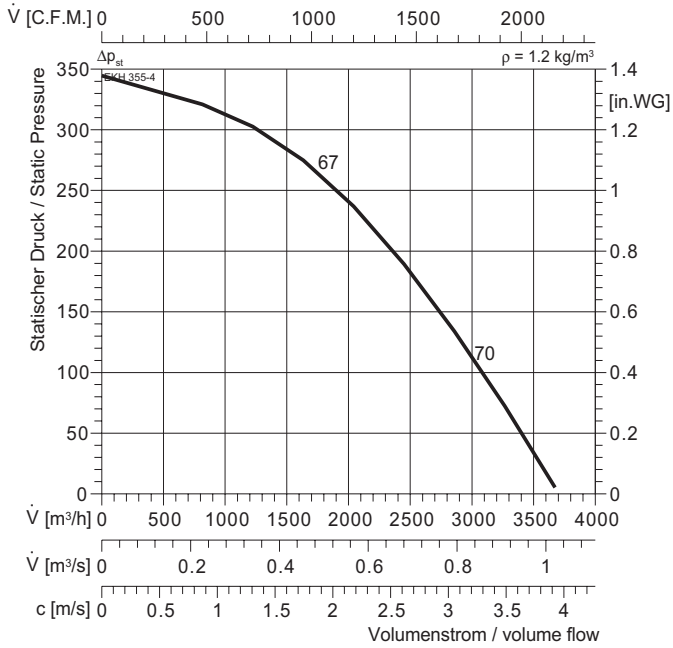


Typ : DKH / DKHS 355-4		IP 54
ArtNr :		DS3
: 37/38 kg		GS 2
U : 400 V 50 Hz		RTD 1,2
P ₂ : 0,37 kW		SAD 9
I _N : 1,06 A		
n : 1340 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

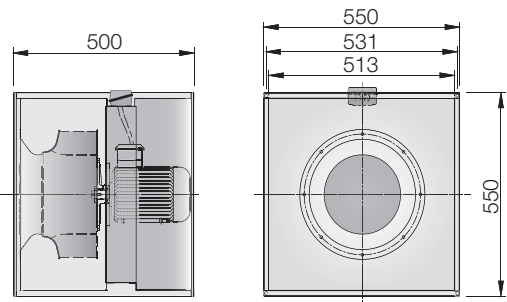


EKHS / DKHS

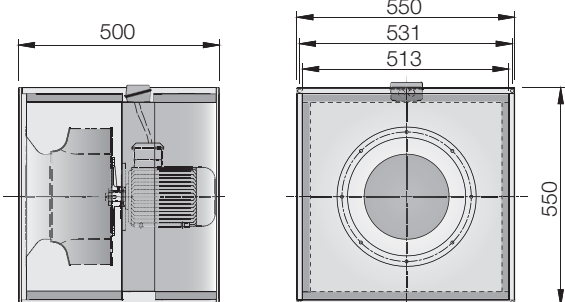


Mounting Feet as Optional

DKH / DKHS 355-6

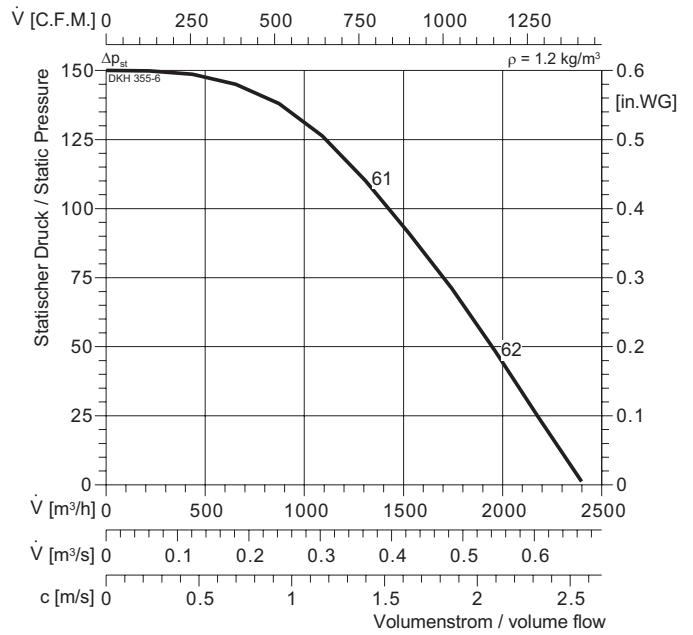


Typ : DKH / DKHS 355-6		IP54
ArtNr :		DS3
: 36/37 kg		GS 2
U : 400 V 50 Hz		RTD 1,2
P ₂ : 0,18 kW		SAD 9
I _N : 0,7 A		
n : 865 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

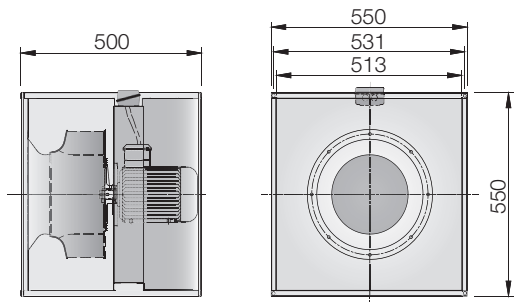


EKHS / DKHS

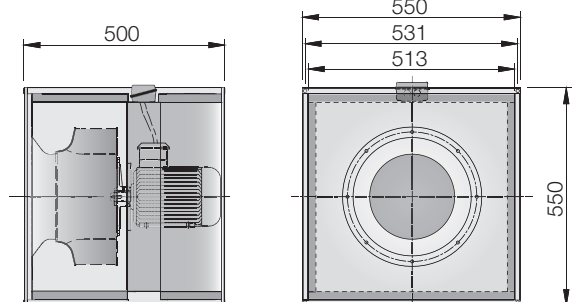

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

EKH / EKHS 400-4

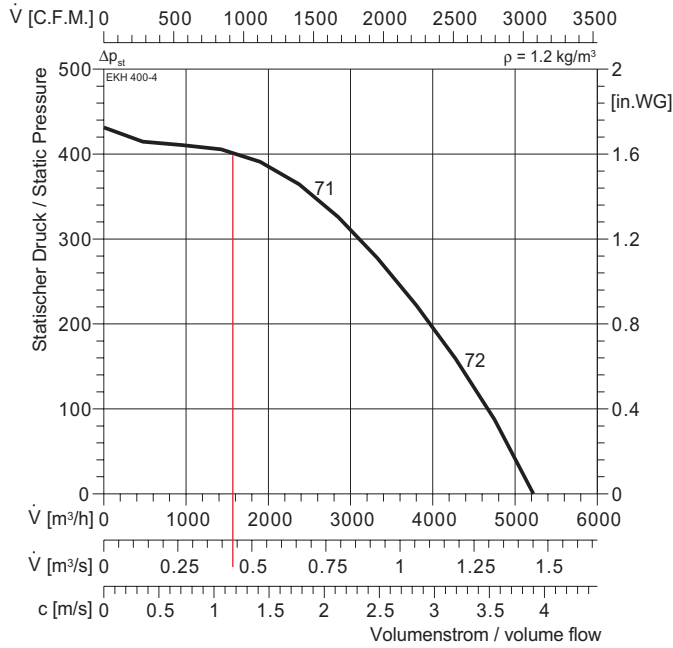


Typ : EKH / EKHS 400-4	⚠ IP 54
ArtNr :	★ E13
■ : 38/40 kg	🗑 GS 1
U : 220 V 50 Hz	🔌 NE 7,5
P ₂ : 0,55 kW	📉 RPE 09
I _N : 4,25 A	
n : 1380 min ⁻¹	
C _{450V} : 25 μF	
t _R : 40 °C	

EKH / EKHS 400-6

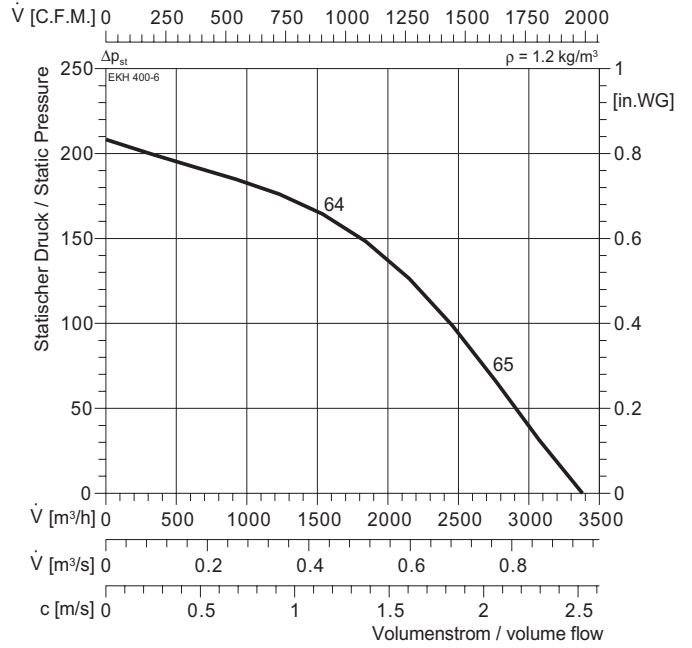


Typ : EKH / EKHS 400-6	⚠ IP54
ArtNr :	★ E13
■ : 38/40 kg	🗑 GS 1
U : 220 V 50 Hz	🔌 NE 3,2
P ₂ : 0,25 kW	📉 RPE 06
I _N : 2,30 A	
n : 860 min ⁻¹	
C _{450V} : 10 μF	
t _R : 40 °C	


EKH / DKH

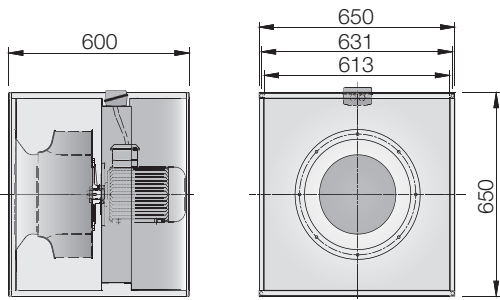


EKH / DKH

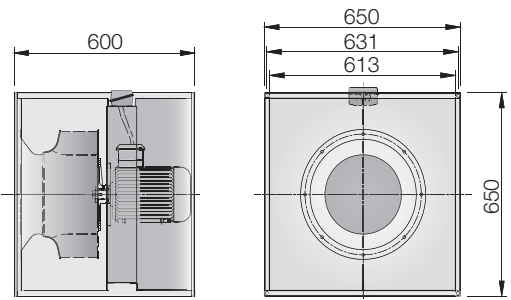

EKHS / DKHS

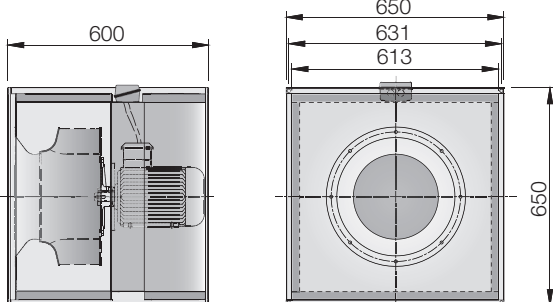

EKHS / DKHS

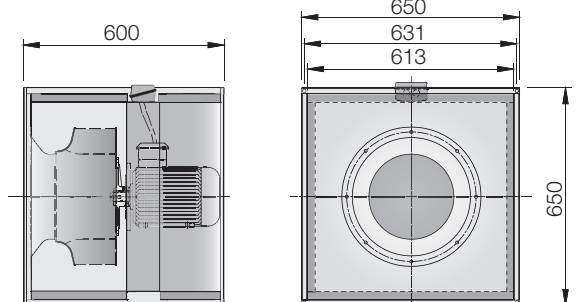








Mounting Feet as Optional

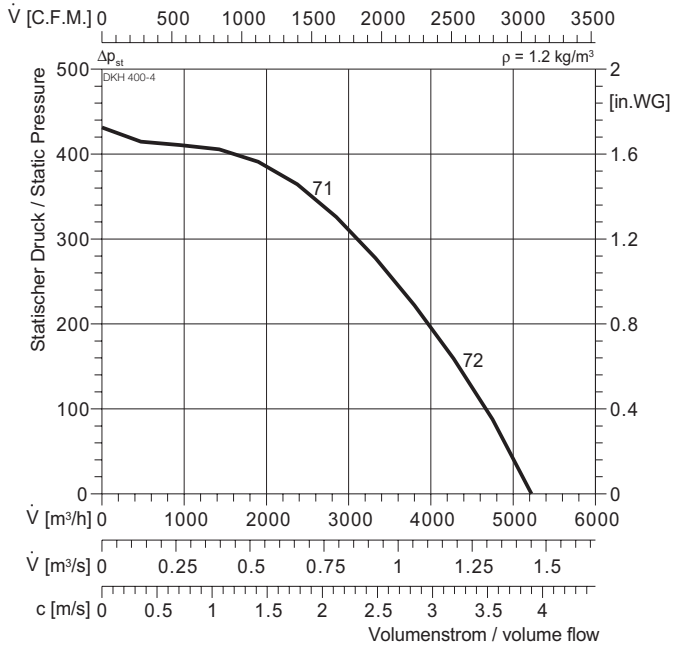Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

DKH / DKHS 400-4




Typ : DKH / DKHS 400-4		IP 54
ArtNr :		DU1
 : 44/46 kg		GS 2
U : 400 V 50 Hz		RTD 2,5
P ₂ : 0,55 kW		SAD 9
I _N : 1,49 A		
n : 1390 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

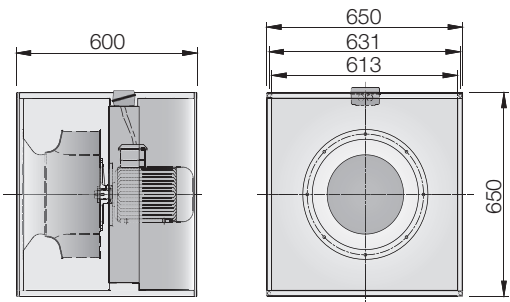




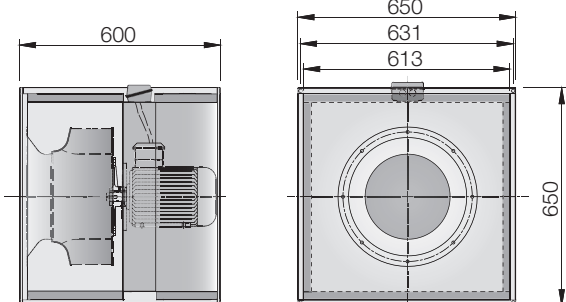



EKHS / DKHS

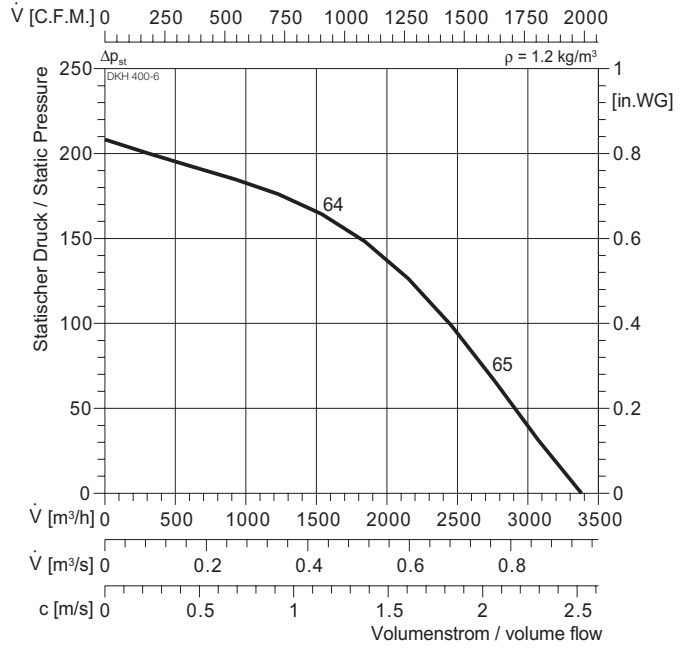


Mounting Feet as Optional

DKH / DKHS 400-6




Typ : DKH / DKHS 400-6		IP 54
ArtNr :		DS3
 : 42/44 kg		GS 2
U : 400 V 50 Hz		RTD 1,2
P ₂ : 0,25 kW		SAD 9
I _N : 0,9 A		
n : 865 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

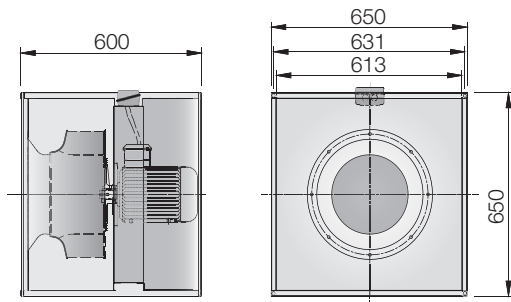


EKHS / DKHS

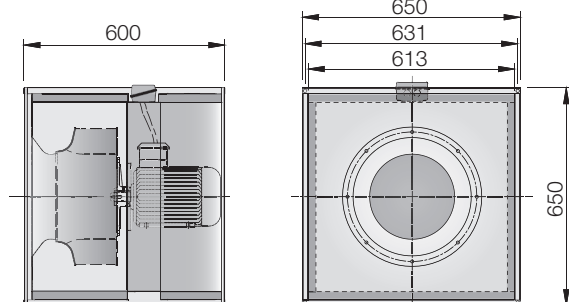

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

EKH / EKHS 450-4

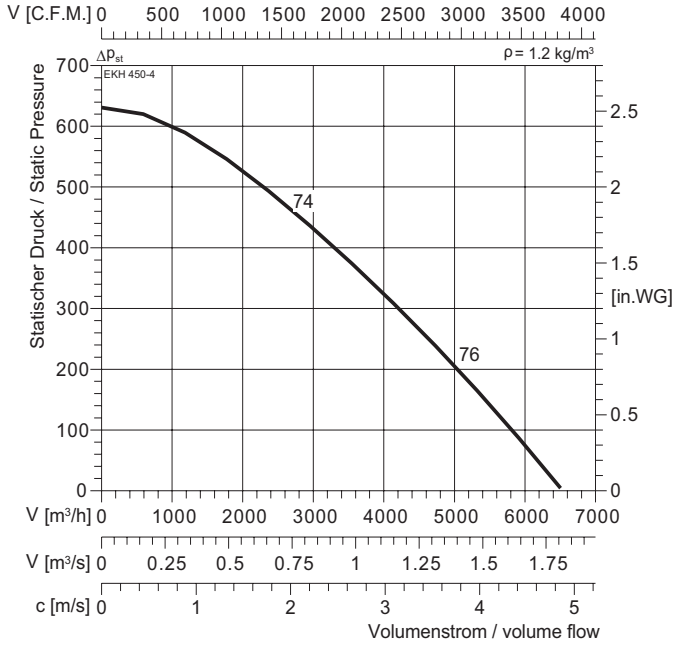


Typ : EKH / EKHS 450-4	⚠ IP 54
ArtNr :	★ E13
■ : 42/44 kg	🗑 GS 1
U : 220 V 50 Hz	🔌 NE 10
P ₂ : 0,75 kW	📉 RPE 09
I _N : 5,45 A	
n : 1380 min ⁻¹	
C _{450V} : 35 μF	
t _R : 40 °C	

EKH / EKHS 450-6

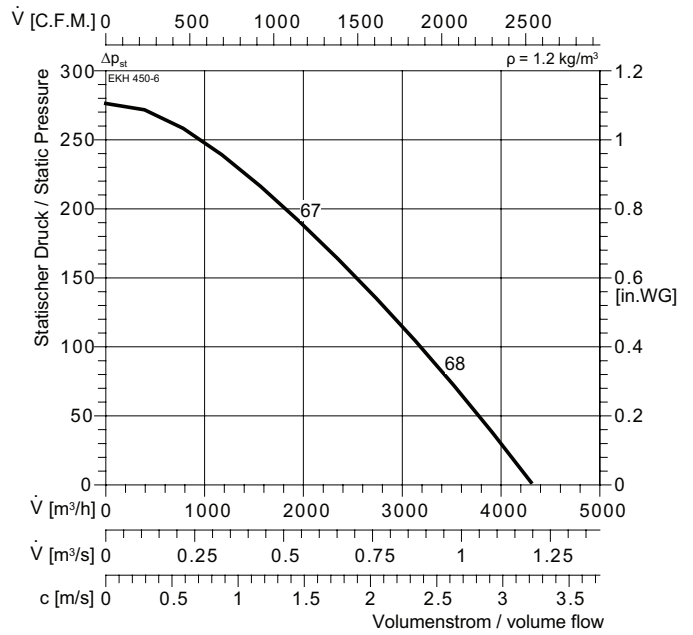


Typ : EKH / EKHS 450-6	⚠ IP54
ArtNr :	★ E13
■ : 42/44 kg	🗑 GS 1
U : 220 V 50 Hz	🔌 NE5
P ₂ : 0,37 kW	📉 RPE 09
I _N : 2,82 A	
n : 910 min ⁻¹	
C _{450V} : 16 μF	
t _R : 40 °C	


EKH / DKH

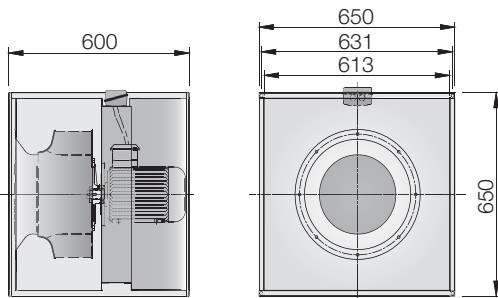


EKH / DKH

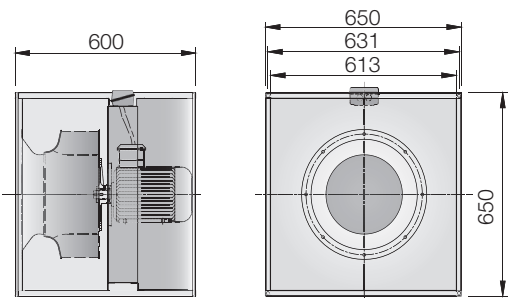

EKHS / DKHS

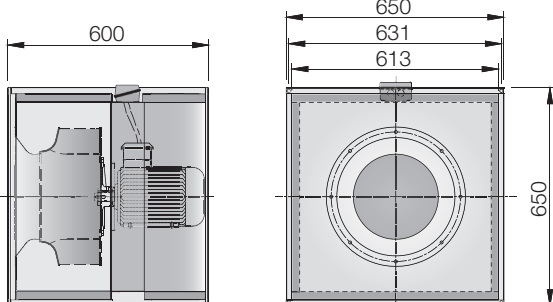

EKHS / DKHS

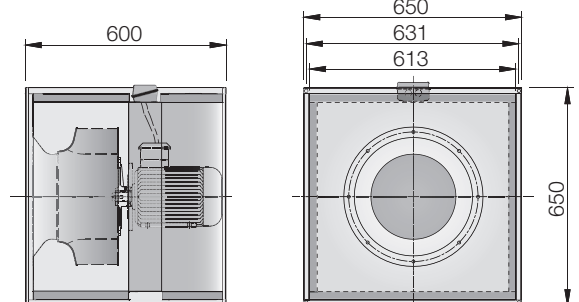


Mounting Feet as Optional

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

DKH / DKHS 450-4

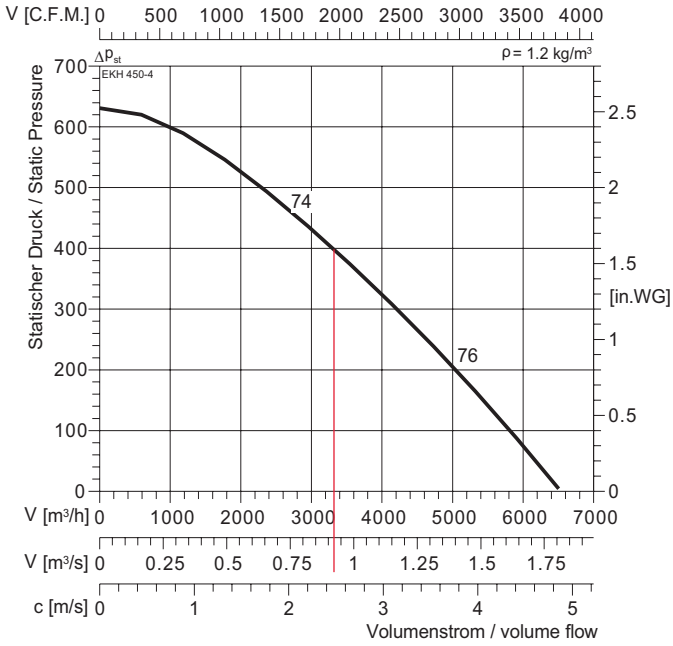


Typ : DKH / DKHS 450-4		IP 54
ArtNr :		DS3
: 48/50 kg		GS 2
U : 400 V 50 Hz		RTD 3
P ₂ : 0,75 kW		SAD 9
I _N : 1,96 A		
n : 1380 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

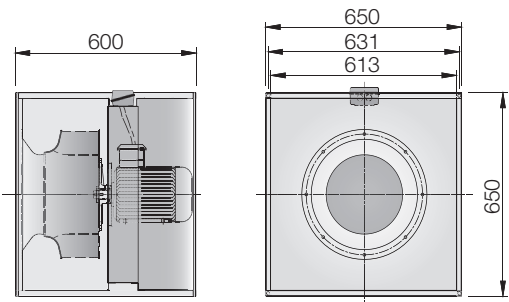


EKHS / DKHS

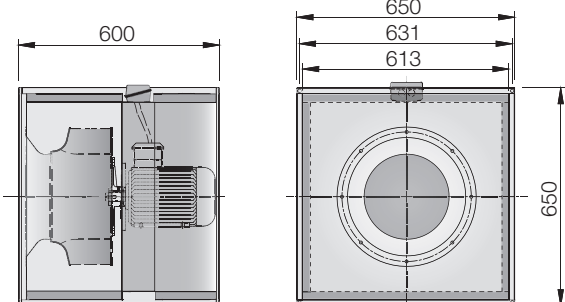

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

DKH / DKHS 450-6

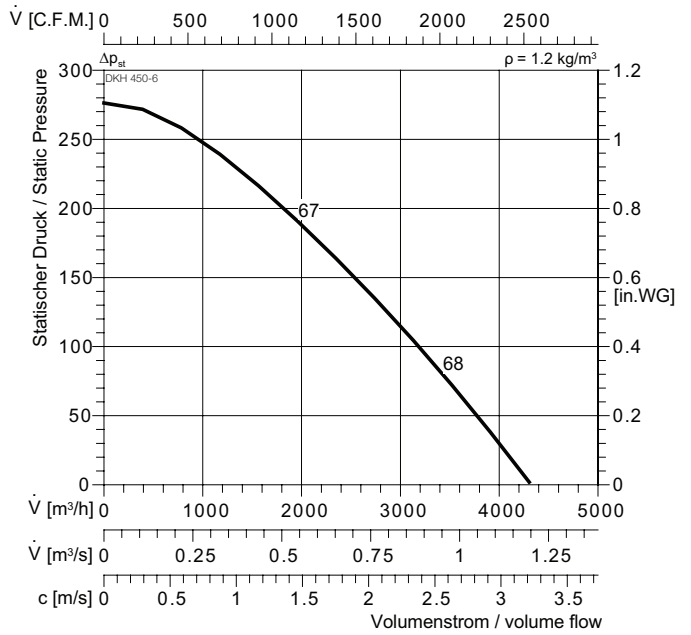


Typ : DKH / DKHS 450-6		IP 54
ArtNr :		DS3
: 48/50 kg		GS 2
U : 400 V 50 Hz		RTD 3
P ₂ : 0,37 kW		SAD 09
I _N : 1,23 A		
n : 885 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

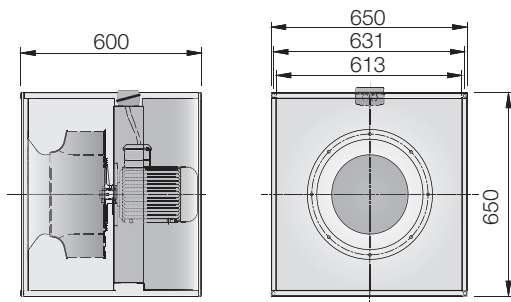


EKHS / DKHS

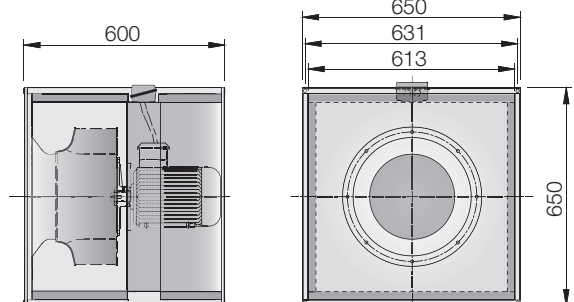


Mounting Feet as Optional

EKR / EKRS 500-4

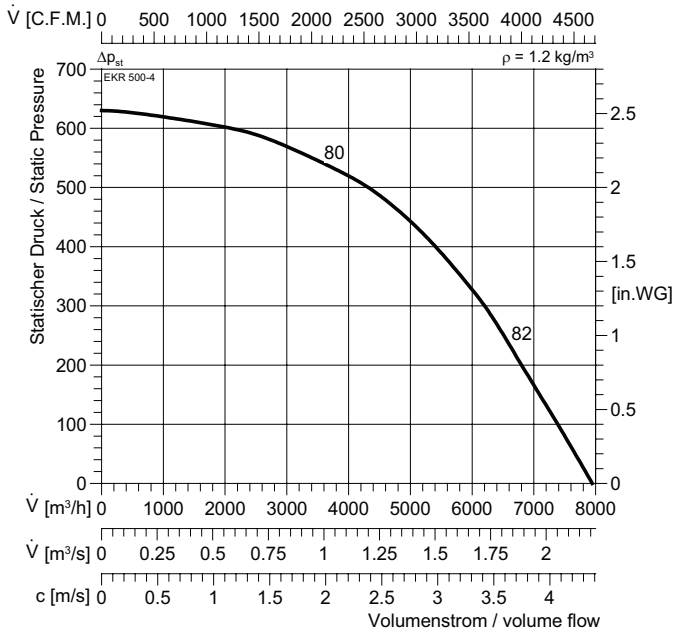


Typ : EKR / EKRS 500-4	IP 54
ArtNr :	E11
62/65 kg	GS 1
U : 230 V 50 Hz	NE 7,5
P ₁ : 1,55 kW	-
I _N : 6,8 A	
n : 1380 min ⁻¹	
C _{450V} : 31 μF	
t _R : 40 °C	

EKR / EKRS 500-6

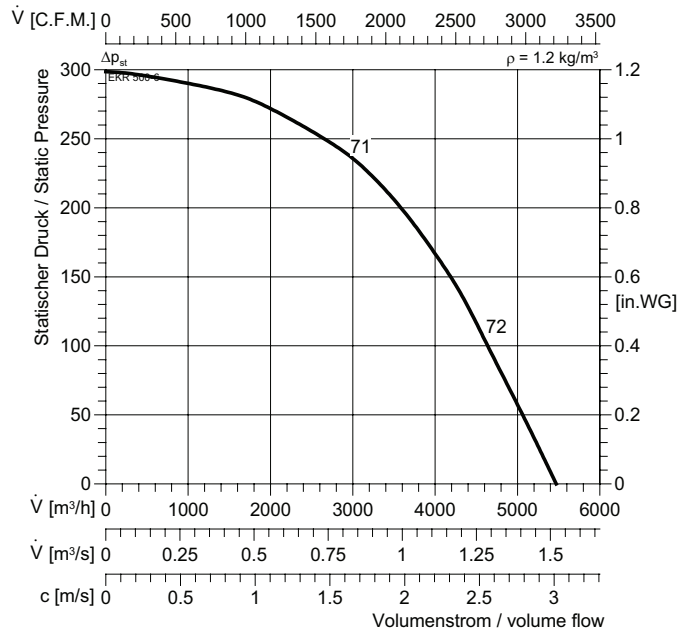


Typ : EKR / EKRS 500-6	IP54
ArtNr :	E11
62/65 kg	GS 1
U : 230 V 50 Hz	NE3,2
P ₁ : 0,43 kW	RPE 09
I _N : 2,1 A	
n : 950 min ⁻¹	
C _{450V} : 19 μF	
t _R : 40 °C	

EKR

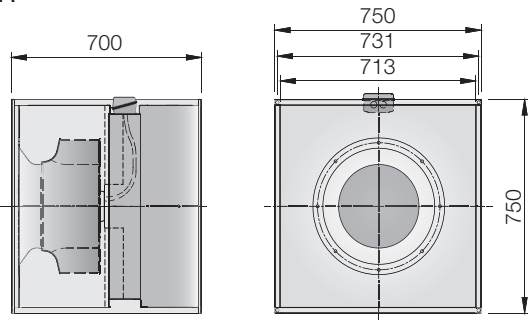


EKRS

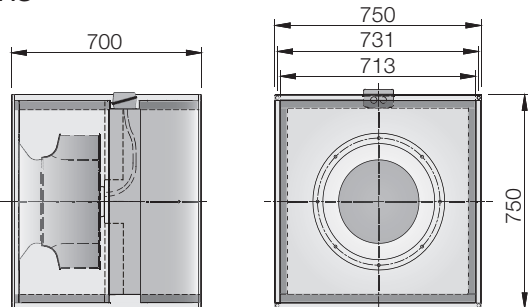


Mounting Feet as Optional

EKR

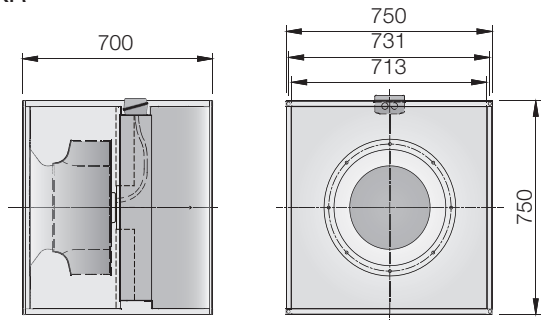


EKRS

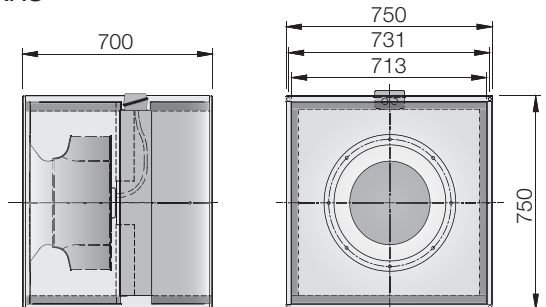

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

EKH / EKHS 500-4

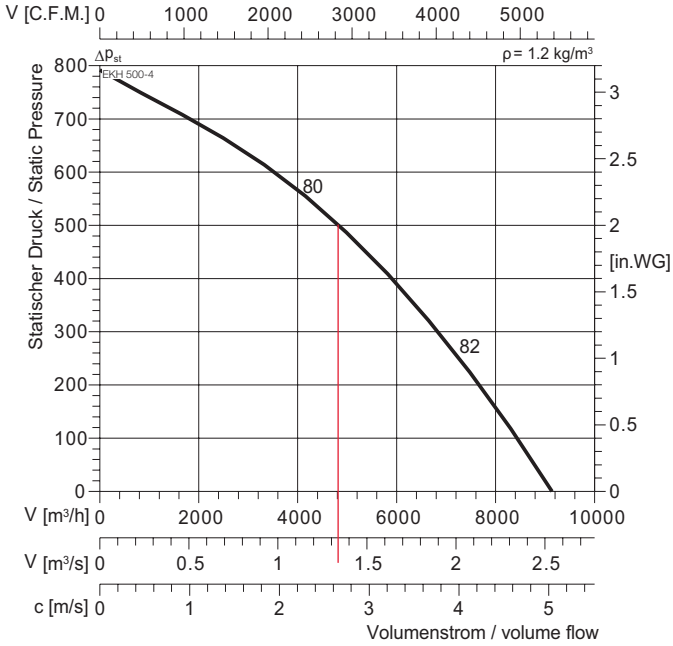


Typ : EKH / EKHS 500-4		IP 54
ArtNr :		E13
: 52/55 kg		GS 1
U : 220 V 50 Hz		NE 10
P ₂ : 1,5 kW		RPE 09
I _N : 9,57 A		
n : 1400 min ⁻¹		
C _{450V} : 60 μF		
t _R : 40 °C		

EKH / DKH

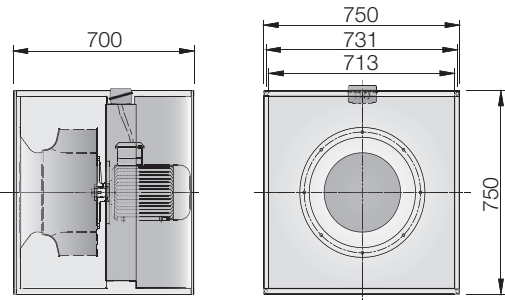


EKHS / DKHS

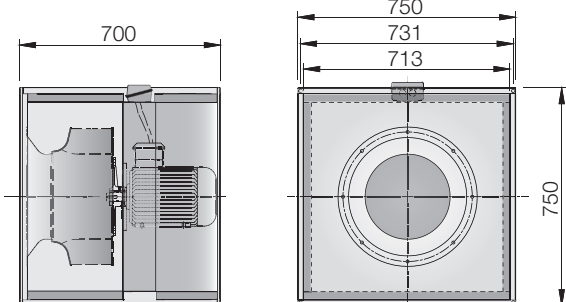

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

EKH / EKHS 500-6

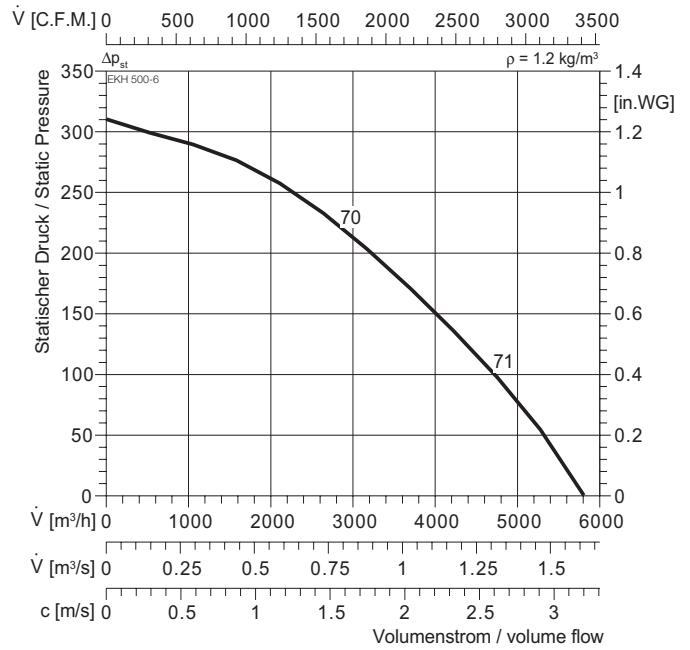


Typ : EKH / EKHS 500-6		IP 54
ArtNr :		E13
: 43/46 kg		GS 1
U : 220 V 50 Hz		NE 5
P ₂ : 0,55 kW		RPE 09
I _N : 4,23 A		
n : 910 min ⁻¹		
C _{450V} : 25 μF		
t _R : 40 °C		

EKH / DKH

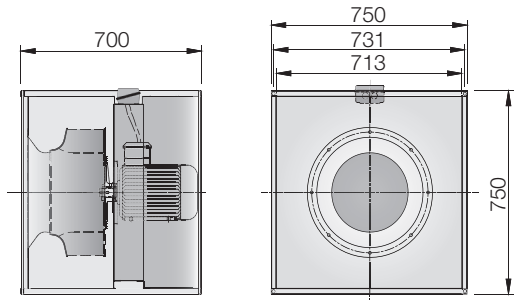


EKHS / DKHS

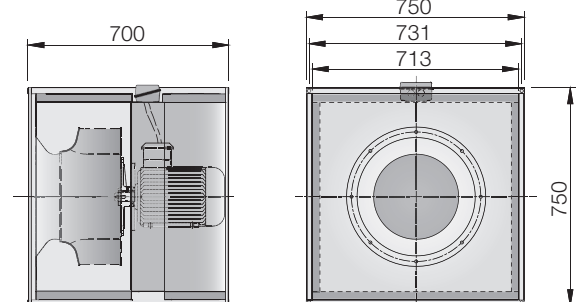


Mounting Feet as Optional

DKH / DKHS 500-4

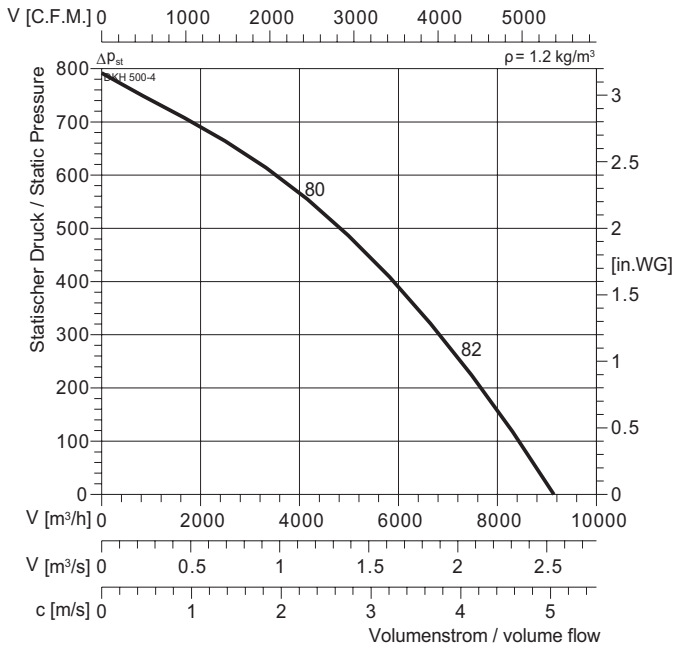


Typ : DKH / DKHS 500-4	⚠ IP 54
ArtNr :	★ DS3
■ : 62/65 kg	🗑 GS 2
U : 400 V 50 Hz	🔌 RTD 3,8
P ₂ : 1,5 kW	📉 SAD 9
I _N : 3,56 A	
n : 1390 min ⁻¹	
C _{450V} : - μF	
t _R : 40 °C	

DKH / DKHS 500-6

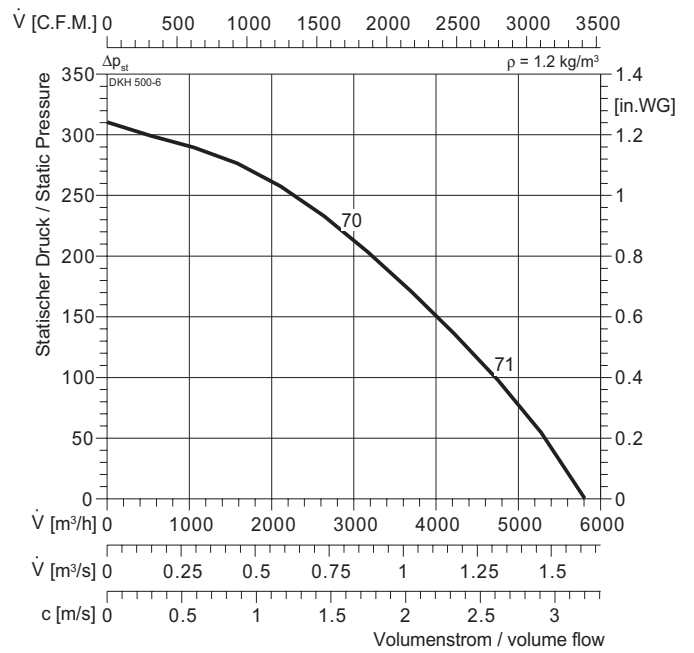


Typ : DKH / DKHS 500-6	⚠ IP 54
ArtNr :	★ DS3
■ : 53/56 kg	🗑 GS 2
U : 400 V 50 Hz	🔌 RTD 2,5
P ₂ : 0,55 kW	📉 SAD 9
I _N : 1,7 A	
n : 885 min ⁻¹	
C _{450V} : - μF	
t _R : 40 °C	


EKH / DKH

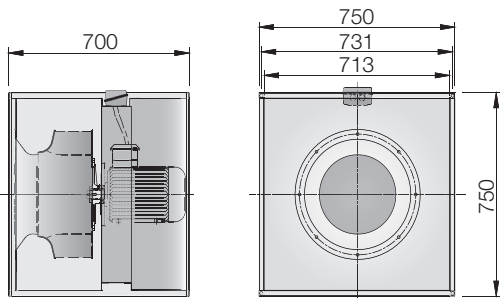


EKH / DKH

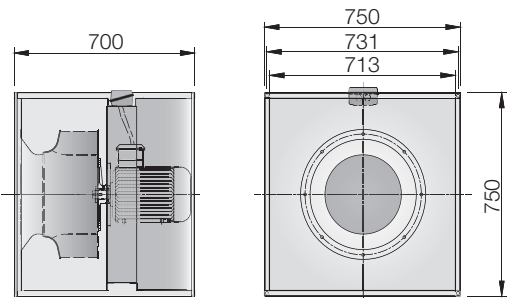

EKHS / DKHS

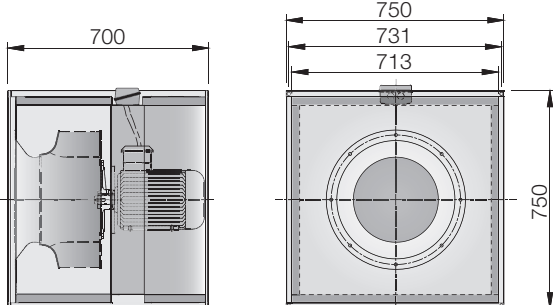

EKHS / DKHS

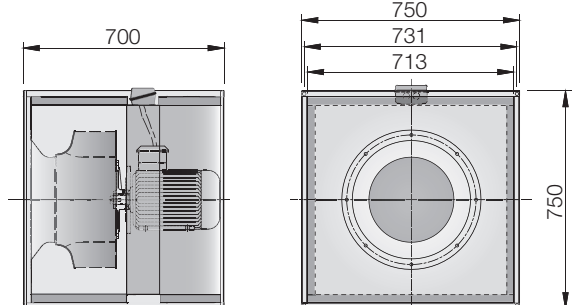


Mounting Feet as Optional

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

EKH / EKHS 560-6

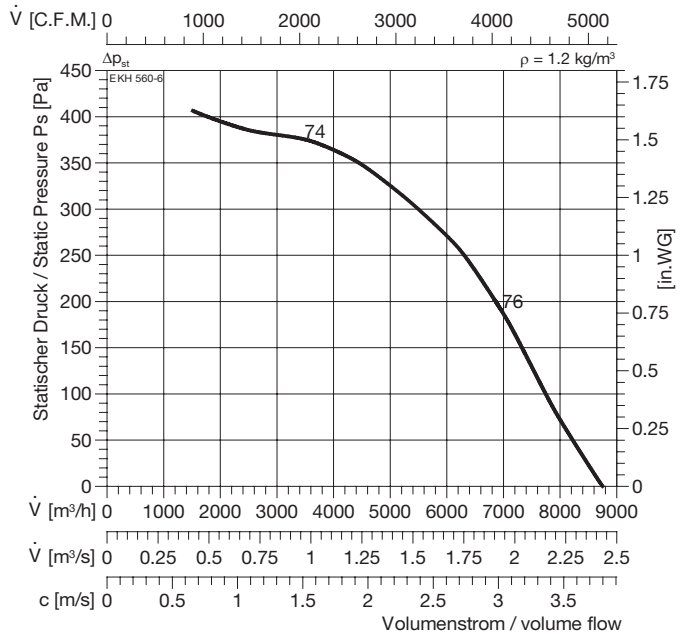


Typ : EKH / EKHS 560-6		IP 54
ArtNr :		E13
: 58/61 kg		GS 1
U : 220 V 50 Hz		NE 7,5
P ₂ : 0,75 kW		RPE 09
I _N : 5,28 A		
n : 910 min ⁻¹		
C _{450V} : 25 μF		
t _R : 40 °C		

EKH / DKH

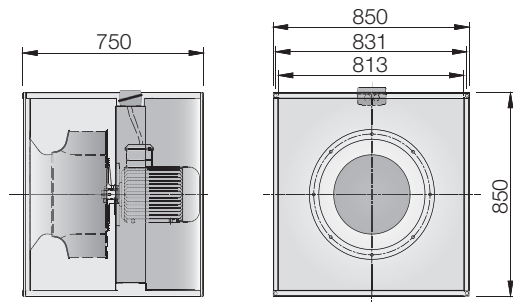


EKHS / DKHS

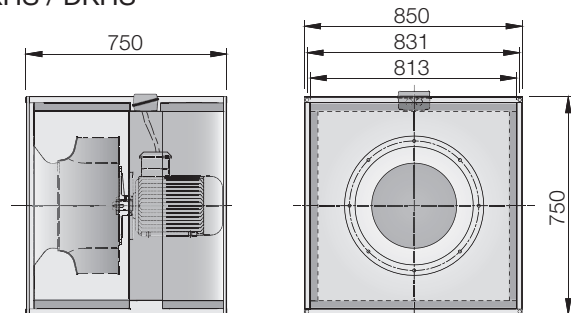







Mounting Feet as Optional

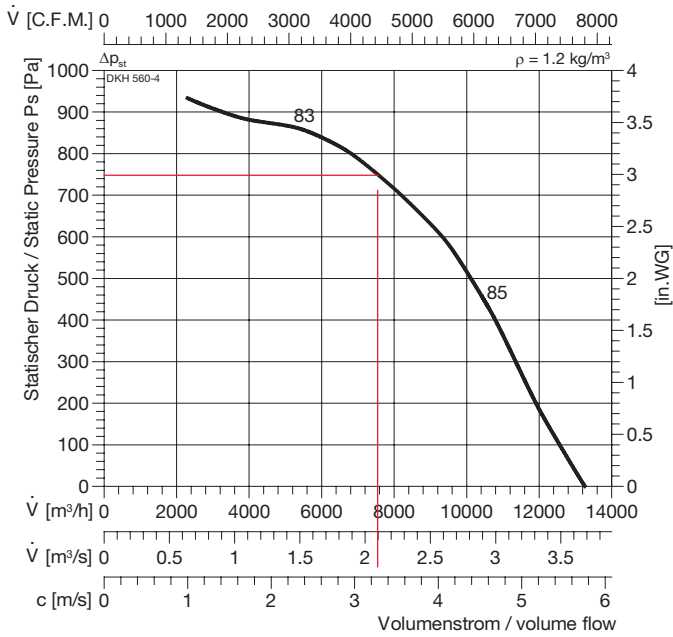
NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.







DKH / DKHS 560-4

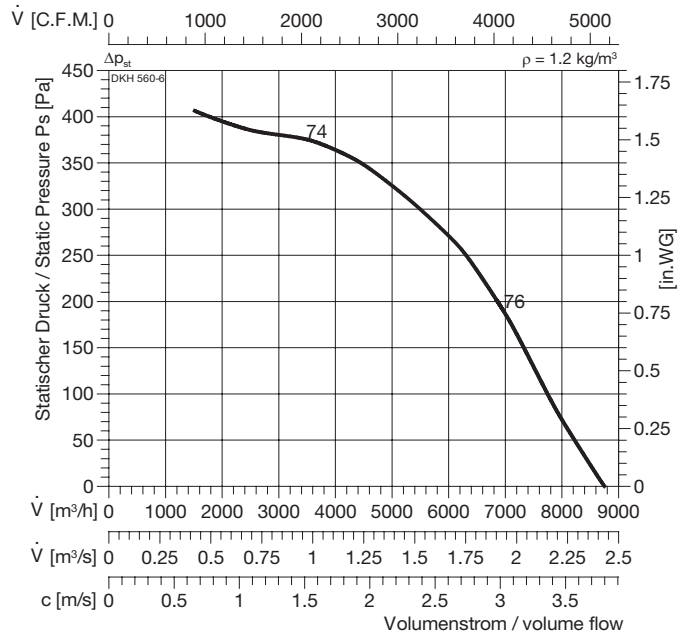


Typ : DKH / DKHS 560-4	 IP 54
ArtNr :	 DS3
 : 72/76 kg	 GS 2
U : 400 V 50 Hz	 RTD 7
P ₂ : 3,0 kW	 SAD 9
I _N : 6,47 A	
n : 1410 min ⁻¹	
C _{450V} : - μF	
t _R : 40 °C	

DKH / DKHS 560-6




Typ : DKH / DKHS 560-6	 IP 54
ArtNr :	 DS3
 : 60/64 kg	 GS 2
U : 400 V 50 Hz	 RTD 2,5
P ₂ : 0,75 kW	 SAD 9
I _N : 2,18 A	
n : 915 min ⁻¹	
C _{450V} : - μF	
t _R : 40 °C	


EKH / DKH

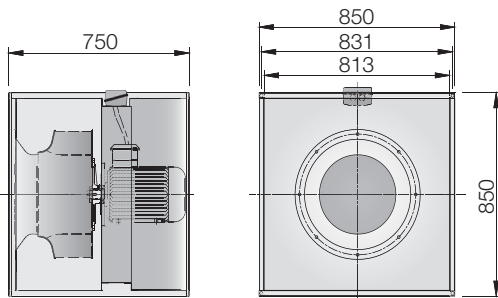


EKH / DKH

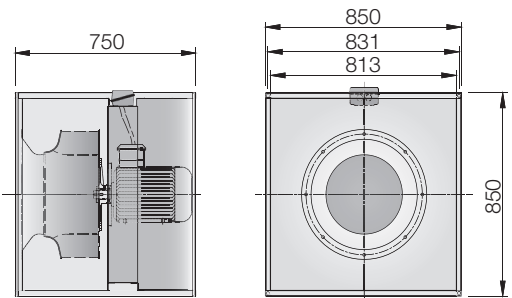

EKHS / DKHS

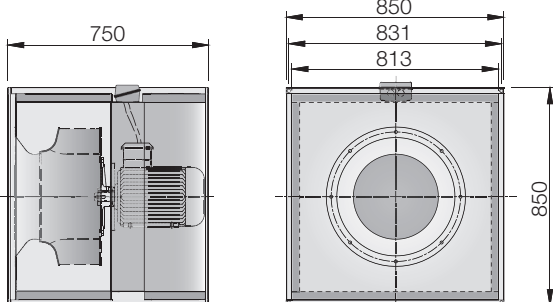

EKHS / DKHS

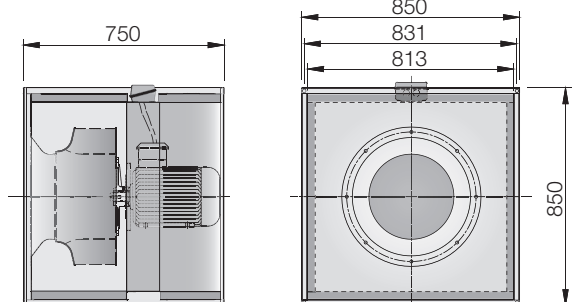


Mounting Feet as Optional

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

DKH / DKHS 630-4

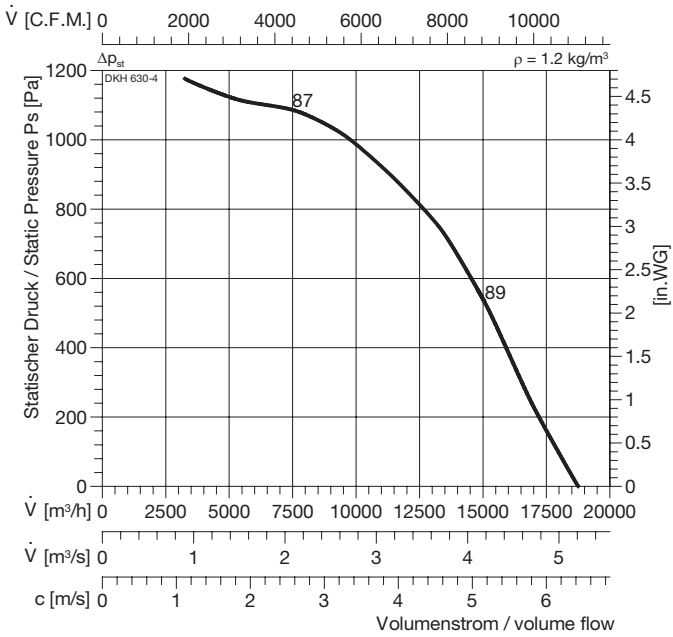


Typ : DKH / DKHS 630-4		IP 54
ArtNr :		DS3
: 99/103 kg		GS 2
U : 400 V 50 Hz		RTD 14
P ₂ : 5,5 kW		-
I _N : 11,3 A		
n : 1445 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

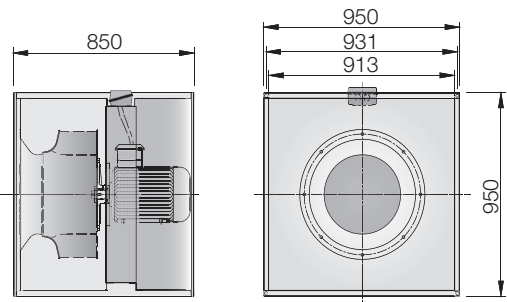


EKHS / DKHS

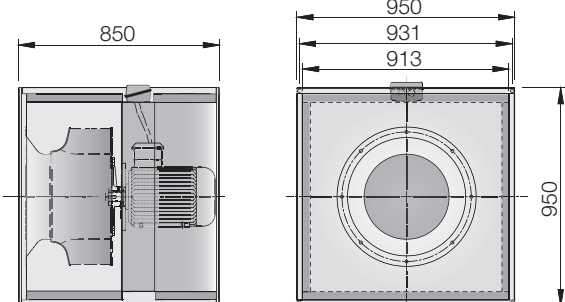

Mounting Feet as Optional


NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

DKH / DKHS 630-6

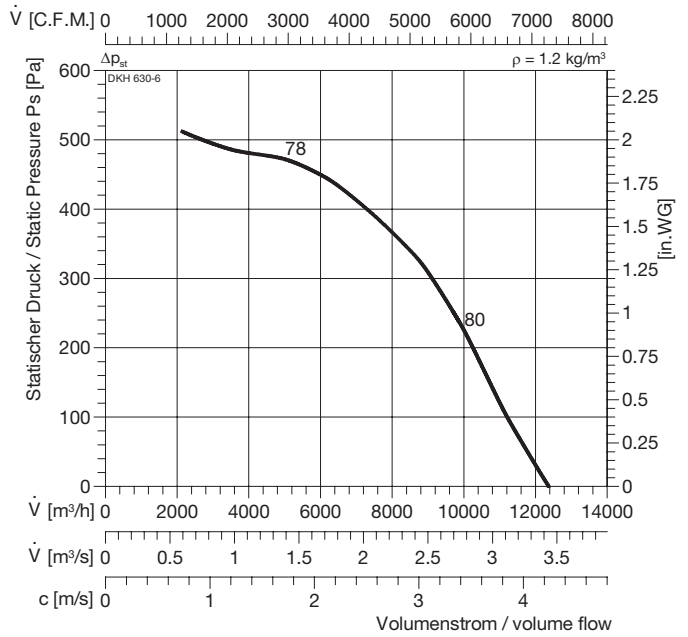


Typ : DKH / DKHS 630-6		IP 54
ArtNr :		DS3
: 75/79 kg		GS 2
U : 400 V 50 Hz		RTD 3,8
P ₂ : 1,5 kW		SAD 9
I _N : 3,8 A		
n : 910 min ⁻¹		
C _{450V} : - μF		
t _R : 40 °C		

EKH / DKH

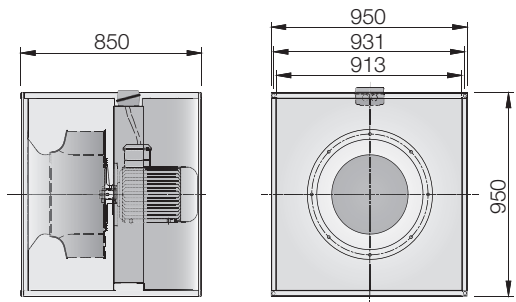


EKHS / DKHS

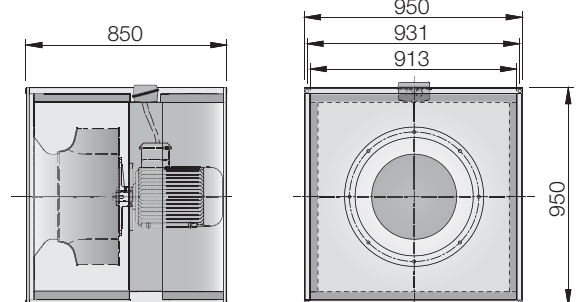


Mounting Feet as Optional

DKH / DKHS 710-4

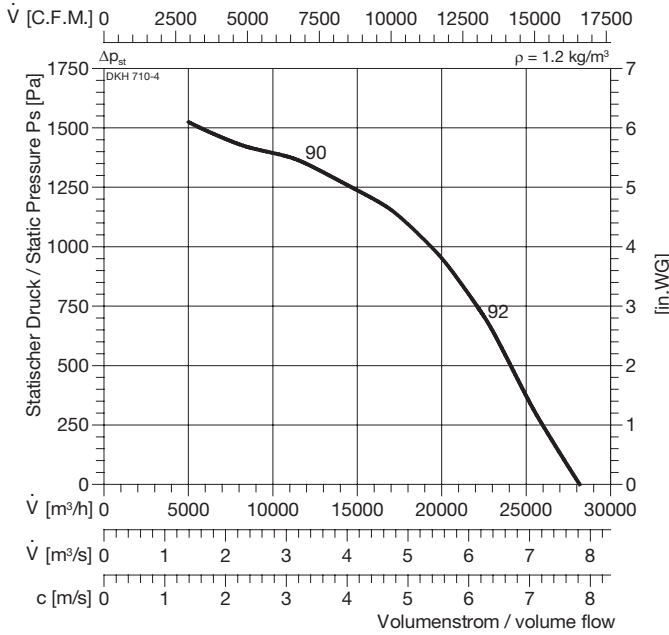


Typ : DKH / DKHS 710-4	IP 54
ArtNr :	DS3
: 130/135 kg	GS 2
U : 400 V 50 Hz	-
P ₂ : 11 kW	-
I _N : 21,4 A	
n : 1460 min ⁻¹	
C _{450V} : - μF	
t _R : 40 °C	

DKH / DKHS 710-6

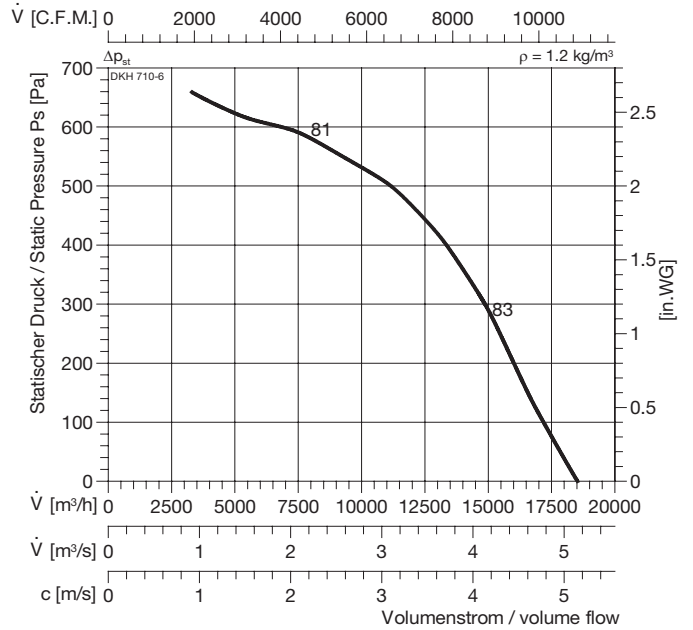


Typ : DKH / DKHS 710-6	IP 54
ArtNr :	DS3
: 80/85 kg	GS 2
U : 400 V 50 Hz	RTD 10
P ₂ : 3,0 kW	SAD 9
I _N : 7,03 A	
n : 960 min ⁻¹	
C _{450V} : - μF	
t _R : 40 °C	


EKH / DKH

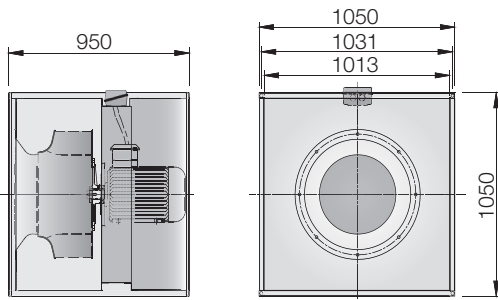


EKH / DKH

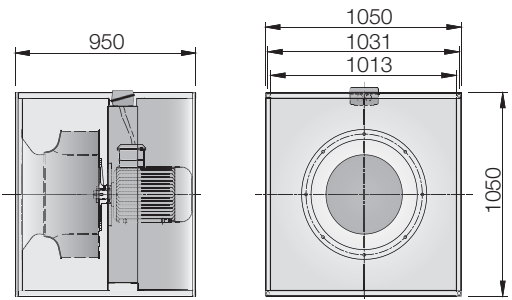

EKHS / DKHS

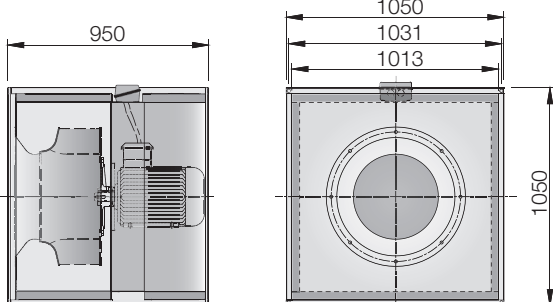

EKHS / DKHS

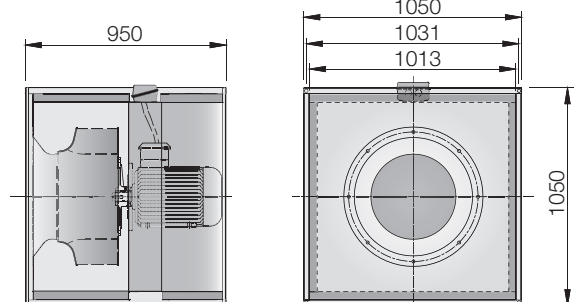

Mounting Feet as Optional

Mounting Feet as Optional

NB: We reserve the right to alter drawings / measurements without notice in case of technical improvements.

Sales Network

Deutschland

Wolter GmbH.
Maschinen-und Apparatebau KG.
DE-76316 Malsch
T +49 (0) 72 04 / 92 01 0
F +49 (0) 72 04 / 92 01 11
info@wolter.eu

Europe

Denmark:

L.ØLAND VENTILATION A/S
DK-2605 Brøndby
T +45 (0) 70 / 20 19 11
salg@airforce.dk

Netherlands:

DE WIT Ventilatoren BV
NL-3821 CG Amersfoort
T +31 (0) 33 / 76 00 240
info@dewitventilatoren.nl

Sweden:

Nordisk Ventilator AB
SE-142 50 Skogås
T +46 (0) 8 / 72 70 250
se@nordiskventilator.se

Switzerland:

Anson AG Zürich
CH-8055 Zürich
T +41 (0) 44 / 46 11 111
F +41 (0) 44 / 46 13 111
info@anson.ch

OZ Tech SA

CH-1122 Romanel-sur-Morges
T +41 (0) 76 / 41 11 572
info@oztech.ch

United Kingdom:

Wolter (UK) Ltd.
GB-Leicestershire LE65 1AL
T +44 (0) 15 30 / 41 24 73
info@wolteruk.com

Middle East

UAE, Saudi Arabia, Qatar, Lebanon:

Please contact Wolter head office

Wolter GmbH.

Maschinen-und Apparatebau KG.
DE-76316 Malsch
T +49 (0) 72 04 / 92 01 0
F +49 (0) 72 04 / 92 01 11
info@wolter.eu

Asia

China:

Guangdong Wolter Chemco Ventilation Ltd.
Boluo, Huizhou, Guangdong

Dongguan Wolter Chemco Ventilation Ltd.

Shipai, Dongguan, Guangdong
T +86 (0) 769 / 8655 7298
F +86 (0) 769 / 8655 7278
info@wolter.com.hk

Taizhou Wolter Ventilation Co. Ltd.

Hengjie, Luqiao District,
Taizhou, Zhejiang
T +86 (0) 576 / 26 22 666 (26 52 888)
F +86 (0) 576 / 26 56 830

China - Hong Kong, Macau:

Wolter Asia Ltd
Kowloon, Hong Kong
T +852 (0) 2456 0198
F +852 (0) 2456 0290
info@wolter.com.hk

China - Taiwan:

Waxlink International Co., Ltd.
8F-2 No.218 Roosevelt Rd.,
Sec.6, Taipei, Taiwan
T +886 (0) 2 / 8932 1196
F +886 (0) 2 / 8932 1197
waxlink@mail.waxlinktw.com

India:

Wolter Ventilators India Pvt. Ltd.
867 D, Block-A, Sushant Lok, Phase-I,
Gurgaon - 122009 (Haryana)
T +91 (0) 124 2577797, 4261001-3
sales@wolterindia.in

Korea:

Kaceco-Wolter
14-1, Dang-dong, Gunpo-shi,
Gyeonggi-do
T +(82) 0 31 / 4773 104
F +(82) 0 31 / 4773 132
wolter@kaceco.com
info@kaceco.com

Malaysia:

Vibrantech (M) Sdn Bhd.
47200 Petaling Jaya Selangor
T +603 (0) 7847 3500
F +603 (0) 7847 3380
sales@vibrantech-sb.com

Singapore:

Wolter Pte. Ltd.
SG-569738 Singapore
T +65 (0) 63 / 52 95 48
F +65 (0) 63 / 52 95 47
info@wolterfans.com.sg

Thailand:

Wolter Ventilation Co., Ltd.
Thamai Kratumban Samutsakorn
741 10 Thailand
T +66 (0) 84 555 2936
kongsakol@wolterfan.com

Australia

The Sydney Fan Company.
NSW 2147, Sydney, Australia
T +61 (0) 2 / 9624 4000
F +61 (0) 2 / 9624 4100
sales@thesydneyfancompany.com

Wolter GmbH Maschinen-und Apparatebau KG

Am Wasen 11
DE-76316 Malsch / Germany
T +49 (0) 72 04 / 92 01 0
F +49 (0) 72 04 / 92 01 11
www.wolter.eu
info@wolter.eu



Air in Motion

Reference: **K01.EKH**, V2023/October, Printed in October, 2023

Dongguan Wolter Chemco Ventilation Ltd. (Wolter Asia)

Shipai, Dongguan City, Guangdong Province, P.R.China

Tel. (+86)769 8655 7298, Fax (+86)769 8655 7278

www.wolterfans.com

info@wolterfans.com

